

- Speedgate DMS128 with swing panels is suitable for one-way or two-way control of the movement of people.
- It is used mainly for access control to objects where high security and a representative appearance are required
- Round or squared front covers.




## Description

- Very robust self-supporting cabinet made of stainless steel sheet 1.5 mm thick. and swing barrier panels made of transparent glass, 8 mm thick.
- 24 - 36 pairs of optical sensors for presence detection and ensuring safety during passage.
- Detomatic S3 drive unit with BLDC motor, gearbox and brake.
- Lockable front cover allows easy access to the control unit.
- Adjustable direction of passage.
- Possibility of integrating readers into the turnstile cabinet.
- Also suitable for people with limited mobility.
- Automatic opening in the event of an alarm or power failure.

## Technical specification

<b>MODEL:</b>	<b>DTS 328</b>
Dimensions of cabinet:	1500 x 120 x 1050 mm
Cabinet material:	stainless steel
Swing barrier panels:	tempered glass
Opening/closing time:	0,4 - 1 sec.
Installation:	interier and exterior
Width of passage:	600 mm - 1000 mm
Max height of barriers:	1800 mm
Power supply:	230 V AC, 50Hz,
Capacity of passage:	40 - 45 pers./min.
MCBF:	5.000.000
Operating voltage:	24 VDC

Dimensions:(mm)

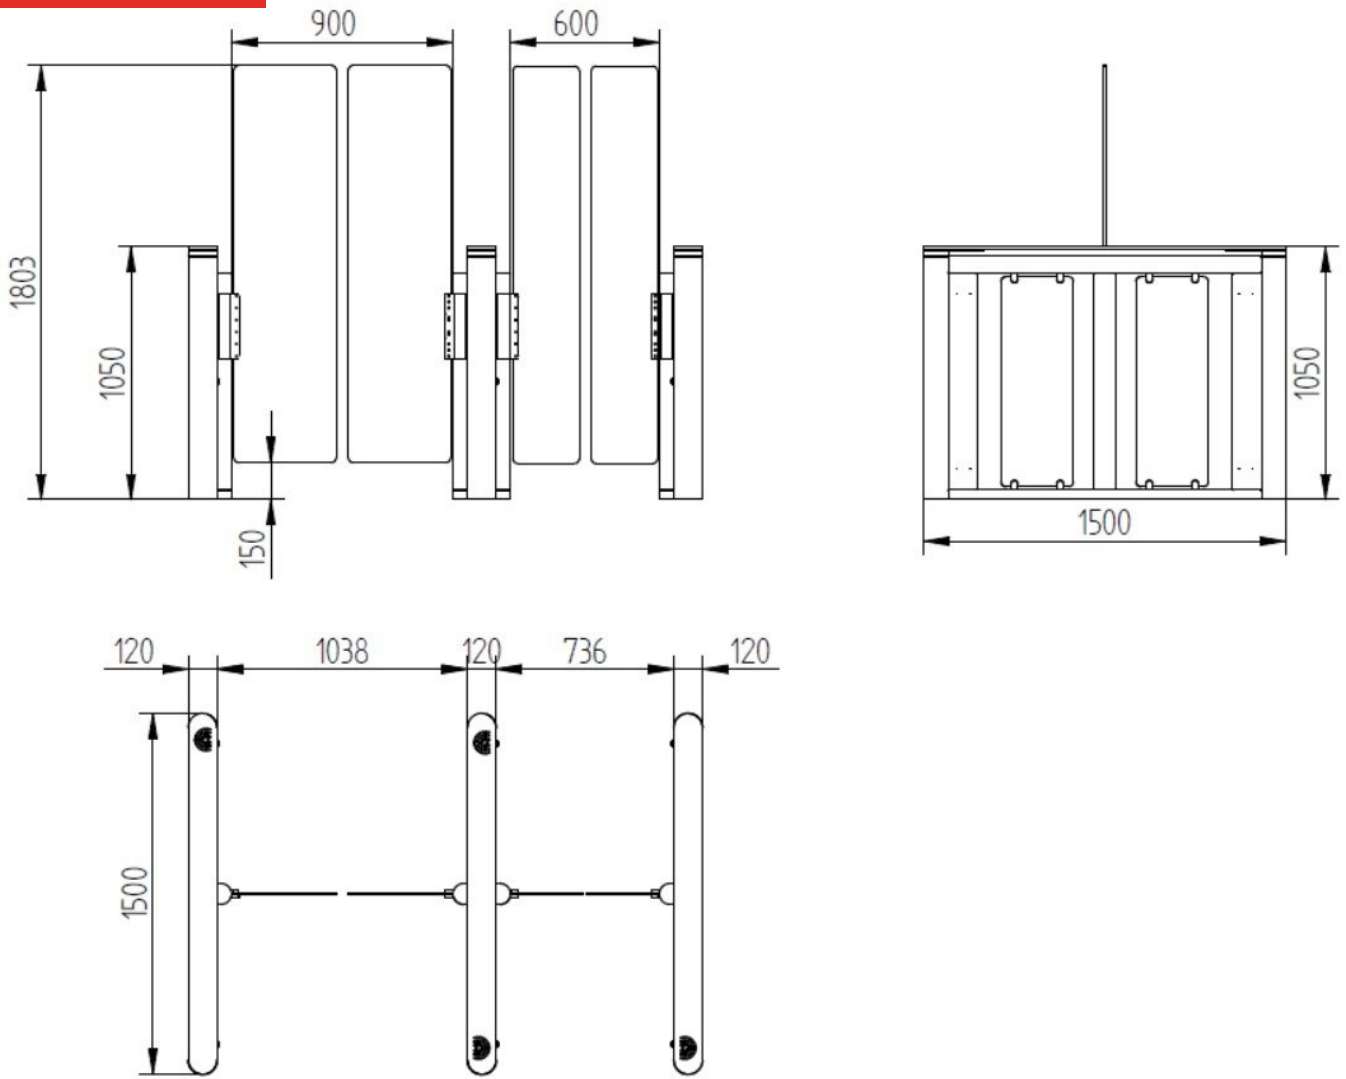

*With a constant view of adopting the latest technological development  
Detomatic reserves the right to amend the information above, at any time.*