



Bi-direction motorized double tripod turnstile in strong and functional design with easy integration of access control devices (card readers and collectors, coins acceptor etc.)




Specification:

- Cabinet made of stainless brushed steel of 1,5 mm thickness and stainless tubes dia. 40, length 500 mm
- Removable top cover
- BLDC motor with gear box and antipanic drop arms
- Integrated control unit ready to incorporate any access control devices
- Biderctional passage
- Both side traffic indicators
- Installation of reader on top cover or in to the foot
- Access both direction controlled or permanently free (1 direction)

Technical specification:

Model:	TRISTAR TWIN
Dimensions:	1270 x 1000 x 1620 mm
Housing:	brushed inox
Installation:	interior and outside
Passage width:	600 mm
Capacity power:	40 + 40 pers./min.
Power:	230 V AC, 50Hz
Motor:	24VDC/30W
Weight:	80 kg
MCBF:	5 mil. cycles

Dimensions:

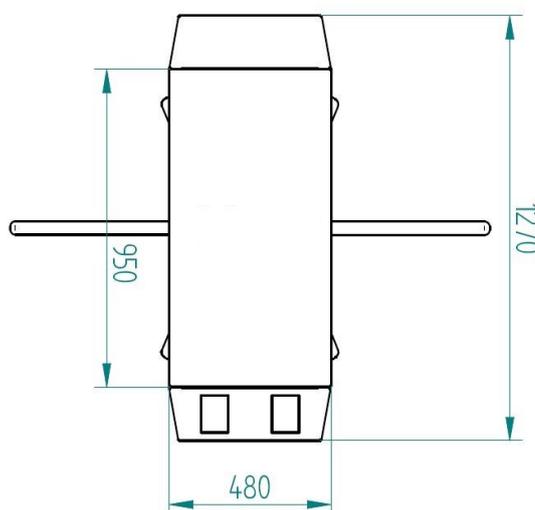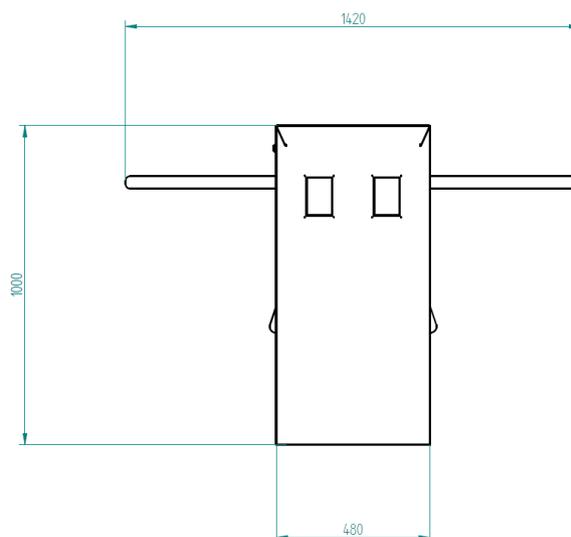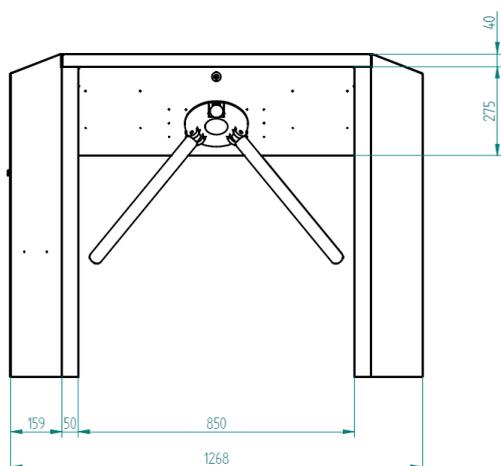

CE

ASParking
ACCESS CONTROL

závory a turnikety
parkovací systémy
vstupenkové systémy
www.asparking.cz

AS Parking s.r.o.
Masarykova 118
CZ - 664 42 Modřice

asparking@asparking.cz
T: +420 515 536 385
F: +420 515 536 391

IČ: 25532961, DIČ: CZ25532961
Bankovní spojení: Název banky
č. ú.: 1234567/0100