


Rapid all purpose automatic barrier for traffic management and industrial sites up to 9 m arm length.

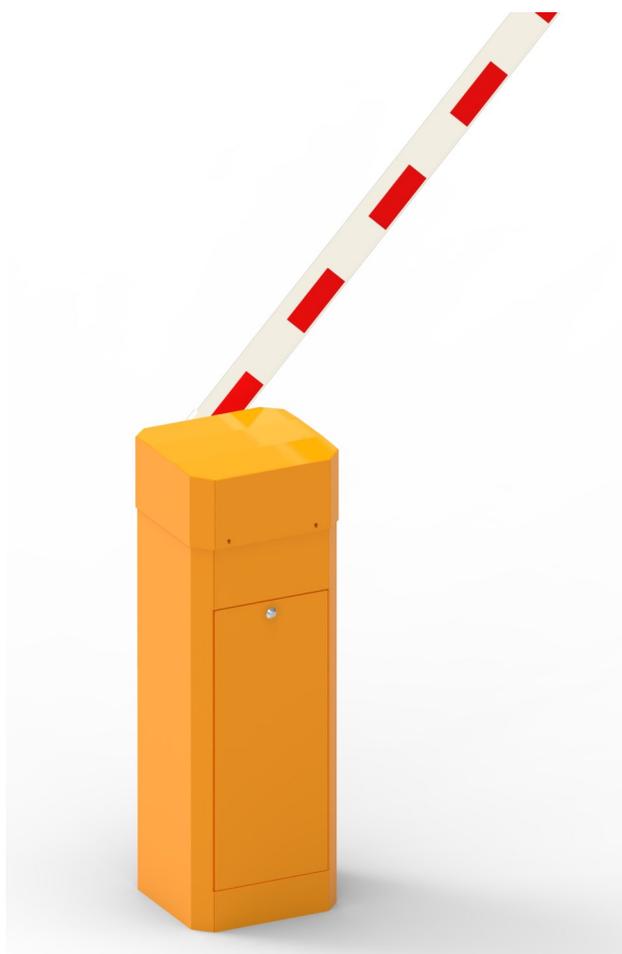

Description:

- Universal rising barrier for traffic management for high intensity of operation.
- Robust cabinet made from metal sheet of 3-6 mm thickness.
- Length of arm up to 9 m, aluminium tube of 90 mm diameter.
- Irreversible three-phase asynchronous gearmotors with high torque.
- Secondary transmission on gearwheel and sprocket wheel..
- Balancing of the arm by means of 4-6 springs.
- Manual wheel for the lifting of arm in case of power failure.
- Control unit with inverter for progressive acceleration and slow deceleration.

Detomatic reserves the right to amend above information at any time.

Technical specifications:

MODEL:	RB 48
Arm length:	9 m
Opening/closing time:	3– 7 sec.
Version:	left or right
Power suply:	230V / 50 Hz
Motor:	250 W
Ambient temperature:	-35°C - +85°C
Weight	120 kg
IP:	54
MCBF:	3.000.000
Dimensions:	440 x 400 x 1070 mm
Emergency lifting:	manual wheel

Accessories:

- Loop detectors
- Key selector
- Articulated arm
- Fixed support with elektromechanical lock
- LED traffic lights
- Remote control
- Fence or aluminium skirt
- LED traffic light on arm
- GSM mobile or remote control

Rozměry (mm)

